

Edge

HP IRON



Charlotte Pipe® Edge HP Iron™ for Aggressive DWV Applications

Charlotte Pipe and Foundry's new Edge HP Iron pipe and fittings system is a specially coated cast iron designed for aggressive DWV applications. While Charlotte Pipe's standard cast iron systems easily meet the needs of the vast majority of DWV installations, in certain aggressive environments, the piping system may need enhanced protection.

Charlotte Pipe Edge HP Iron is specifically designed for aggressive applications and installations such as:

- Exposure to undiluted cleaning chemicals with a pH range of 2 to 12
- Hospitals
- Casinos
- Commercial kitchens
- Soda fountains
- Bar sinks
- Parking garages



PERFORMANCE

Charlotte Pipe Edge HP Iron™ meets or exceeds all of the coating performance requirements found within EN 877. This system also conforms to ASTM A 74 (Service and Extra Heavy), ASTM A 888 and CISPI 301 (Hubless) standards. It is certified by NSF International as conforming with all performance and quality control requirements of the standards listed above.

EDGE HP IRON™ LINE INCLUDES:

- 2"-15" NH and SV pipe in 10' lengths
- More than 560 SKUs of 2"-15" NH, SV and XH fittings
- For use in aggressive drain, waste and vent (DWV) and storm drainage applications
- Not suitable for chemical waste applications
- NSF International and IAPMO listed
- Charlotte Pipe's pipe and fittings must be joined with NSF-listed couplings and neoprene gaskets

EDGE HP IRON™ FITTINGS

Epoxy Acrylic Powder Coat on ID & OD
Cathodic Epoxy E-coat on ID & OD
Zinc Phosphate on ID & OD
Cast Iron

EDGE HP IRON™ PIPE

Anodic Epoxy E-coat on ID & OD
Cathodic Epoxy E-coat on ID & OD
Zinc Phosphate on ID & OD
Cast Iron



FIELD-CUT PATCHES

Charlotte Pipe does not require cut pipe ends to be coated. When pipe is cut in the field, uncoated ends are exposed to the effluent flowing through the piping system. Charlotte Pipe's superior e-coating process ensures that the effluent will not get under the coating and cause any delamination of the coating. Also, the pipe stops incorporated into the neoprene fluid seals provide a limited degree of protection from the effluent.

Where an on-site coating of the cut edges is desired or specified, we recommend using PPG Multi-Prime for edge protection. Multi-Prime 4160 is fast drying, while Multi-Prime 4360 is low VOC. Both are available in a variety of colors and sizes. Multi-Prime is available through PPG's distribution network at www.ppgpaints.com/store-locator.

SUGGESTED SPECIFICATIONS

HIGH-PERFORMANCE COATED 2"-15" HUBLESS CAST IRON SOIL PIPE AND FITTINGS ([ABOVE] [BELOW] GRADE)

- A. Pipe and Fittings: ASTM A 888 and CISPI 301.
- B. Tensile Strength: 21,000 psig minimum.
- C. All pipe and fittings shall be marked with the collective trademark of the Cast Iron Soil Pipe Institute® and listed by NSF® International.
- D. Each length of pipe and each fitting shall be plainly marked with size, country of origin, and name of manufacturer, or manufacturer's registered trademark by which the manufacturer can be readily identified after installation.
- E. The inside of each pipe shall be reamed prior to coating to decrease the coefficient of friction.
- F. Couplings: Hubless Couplings shall conform to CISPI Standard 310, shall be manufactured in the United States, and be certified by NSF® International. Heavy Duty couplings shall conform to ASTM C 1540 and shall be manufactured in the United States.
- G. Pipe Coating: Chemically deposited zinc-phosphate pretreatment layer followed by an electrically deposited, high-performance cathodic epoxy coating, and finally an electrically deposited, high-performance anodic epoxy top coat.
- H. Fitting Coating: Chemically deposited zinc-phosphate pretreatment layer followed by an electrically deposited, high-performance cathodic epoxy coating, and finally an epoxy acrylic powder top coat.
- I. Coating Performance: Pipe and Fitting Coatings must pass the following performance specifications per EN 877:
 - a. 350 hours of salt spray testing
 - b. Resistance to wastewater for 30 days at 73° F
 - c. Chemical resistance from pH 2 to pH 12 for 30 days at 73° F
 - d. Resistance to hot water for 24 hours at 203° F

HIGH-PERFORMANCE COATED 2"-15" HUB-AND-SPIGOT, CAST IRON SOIL PIPE AND FITTINGS ([ABOVE] [BELOW] GRADE)

- A. Pipe and Fittings: ASTM A 74, Service class.
- B. Tensile Strength: 21,000 psig minimum.
- C. All pipe and fittings shall be marked with the collective trademark of the Cast Iron Soil Pipe Institute® and listed by NSF® International.
- D. Each length of pipe and each fitting shall be plainly marked with size, country of origin, and name of manufacturer, or manufacturer's registered trademark by which the manufacturer can be readily identified after installation.
- E. The inside of each pipe shall be reamed prior to coating to decrease the coefficient of friction.
- F. Gaskets: ASTM C 564 rubber.
- G. Caulking Materials: ASTM B 29, pure lead and oakum or hemp fiber.
- H. Pipe Coating: Chemically deposited zinc-phosphate pretreatment layer followed by an electrically deposited, high-performance cathodic epoxy coating, and finally an electrically deposited, high-performance anodic epoxy top coat.
- I. Fitting Coating: Chemically deposited zinc-phosphate pretreatment layer followed by an electrically deposited, high-performance cathodic epoxy coating, and finally an epoxy acrylic powder top coat.
- J. Coating Performance: Pipe and Fitting Coatings must pass the following performance specifications per EN 877:
 - a. 350 hours of salt spray testing
 - b. Resistance to wastewater for 30 days at 73° F
 - c. Chemical resistance from pH 2 to pH 12 for 30 days at 73° F
 - d. Resistance to hot water for 24 hours at 203° F


PO BOX 35430
CHARLOTTE
NORTH CAROLINA 28235

PHONE (704) 348 6450
(800) 438 6091

FAX (800) 553 1605

INTERNATIONAL FAX
(704) 348 9884

WWW.CHARLOTTEPIPE.COM

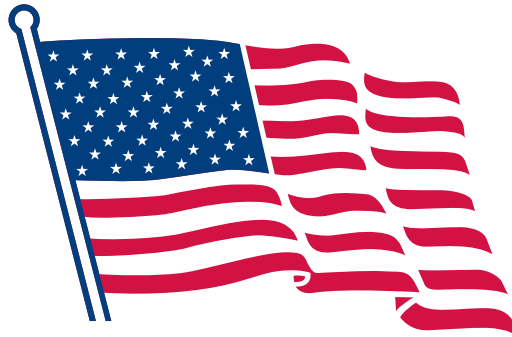

All products manufactured by
Charlotte Pipe and Foundry Company
are proudly made in the U.S.A.